

INSTALLATION GUIDE

TOP ENTRY CABLE BT 24V BAR

Exclusive document for product installation and assembly



1. SAFETY PRECAUTIONS



! CAUTION

The equipment must be installed by a certificated technician.

The electrical installation must respect the technical rules.

Install only indoors.

Switch off the electrical power before making any connection.

Respect the indicated voltage and installation procedure.

The installer must use a connector that respects the IP64 index.


End-of-life: Don't discard as unsorted waste. Send to a WEEE (Waste, Disused Electrical and Electronic Equipment) collection point.

2. ACCESSORIES



180° fixing clip

3. DIMENSIONS (mm)

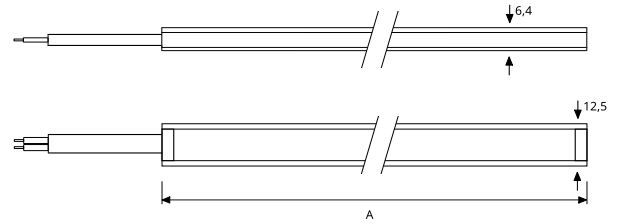


SIZE	A
8	90
16	170
24	250
32	330
40	410
48	490
56	570
64	650
72	730
80	810
88	890
96	970
104	1050

SIZE	A
112	1130
120	1210
128	1290
136	1370
144	1450
152	1530
160	1610
168	1690
176	1770
184	1850
192	1930
200	2010

4. INSTALLATION PROCEDURE


4.1 INSTALL FIXING CLIPS

Fix the 180° fixing clips to the ceiling or chosen surface.
Maximum distance between fixing clips: 60 cm.

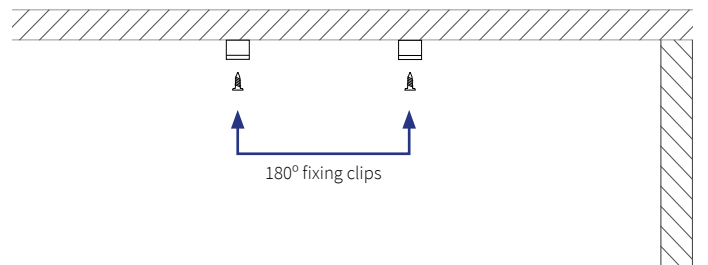


4.2 HOLE FOR POWER CABLE

Make a hole for the power cable to pass through.

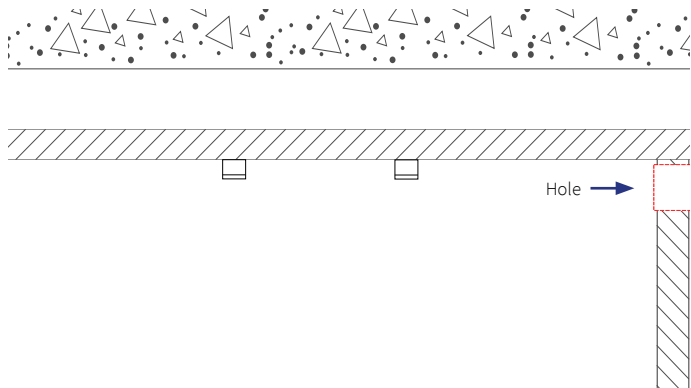


4.3 FIX THE BAR TO THE CLIPS

Attach the bar to the fixing clips.

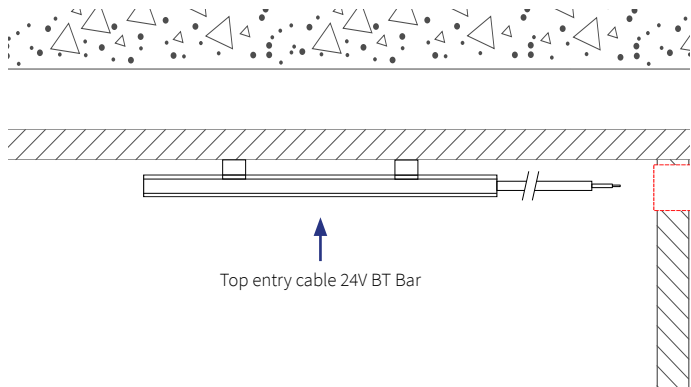


4.4 CONNECT THE CABLE TO THE POWER SUPPLY

The connection connector must meet the appropriate electrical requirements for the intended purpose.

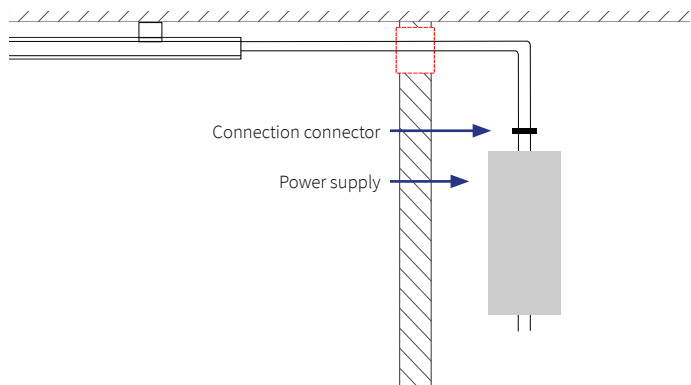

4.5 CONNECT POWER SUPPLY TO ELECTRICAL NETWORK

The connection connector must meet the appropriate electrical requirements for the intended purpose.

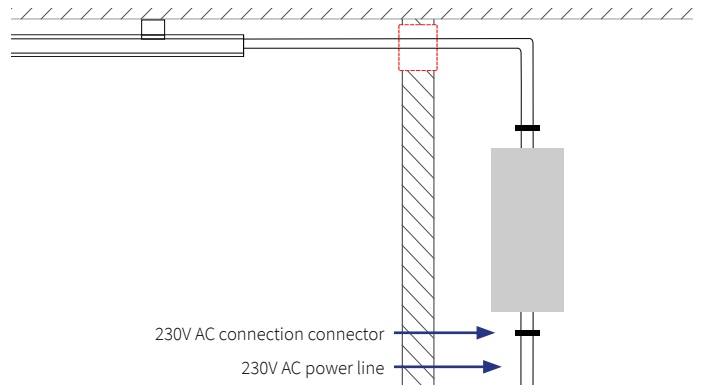

Power Supply

Use a constant voltage power supply for LED modules, 24V DC output, insulation class 2, SELV, certified according to EN61347 standards for Europe and UL8750 for USA.

INSTALLATION GUIDE

TOP ENTRY CABLE WITH ASQC2 CONNECTOR BT 24V BAR

Exclusive document for product installation and assembly



1. SAFETY PRECAUTIONS



! CAUTION

The equipment must be installed by a certificated technician.

The electrical installation must respect the technical rules.

Install only indoors.

Switch off the electrical power before making any connection.

Respect the indicated voltage and installation procedure.

End-of-life: Don't discard as unsorted waste. Send to a WEEE (Waste, Disused Electrical and Electronic Equipment) collection point.

2. ACCESSORIES




180° fixing clip



ASQC2 cable

3. DIMENSIONS (mm)

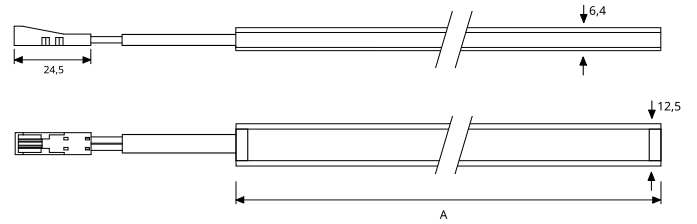


SIZE	A
8	90
16	170
24	250
32	330
40	410
48	490
56	570
64	650
72	730
80	810
88	890
96	970
104	1050

SIZE	A
112	1130
120	1210
128	1290
136	1370
144	1450
152	1530
160	1610
168	1690
176	1770
184	1850
192	1930
200	2010

4. INSTALLATION PROCEDURE


4.1 INSTALL FIXING CLIPS

Fix the 180° fixing clips to the ceiling or chosen surface.
Maximum distance between fixing clips: 60 cm.

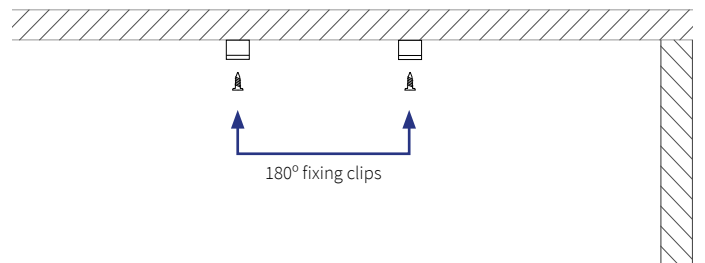


4.2 HOLE FOR POWER CABLE

Make a hole for the power cable to pass through.

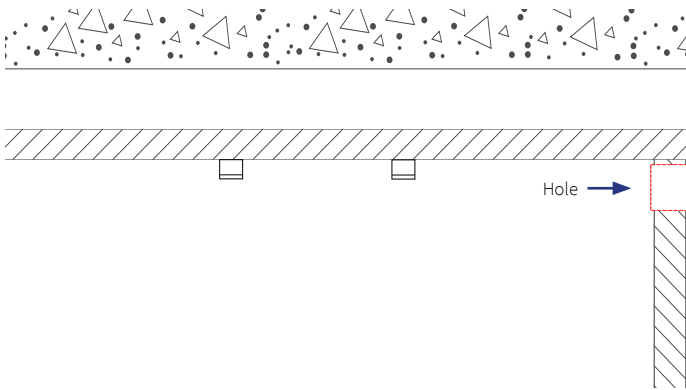


4.3 FIX THE BAR TO THE CLIPS

Attach the bar to the fixing clips.

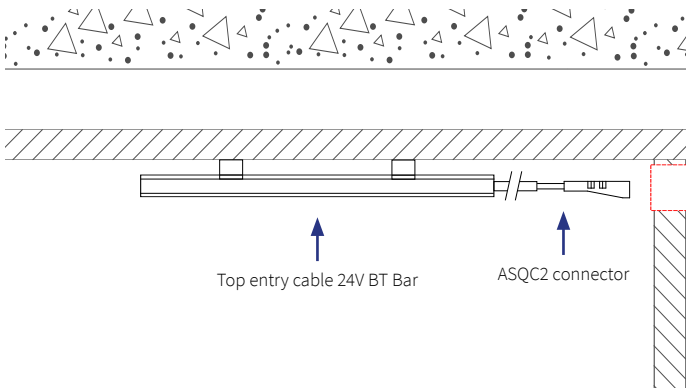


4.4 CONNECT THE CABLE TO THE POWER SUPPLY

The connection connector must meet the appropriate electrical requirements for the intended purpose.

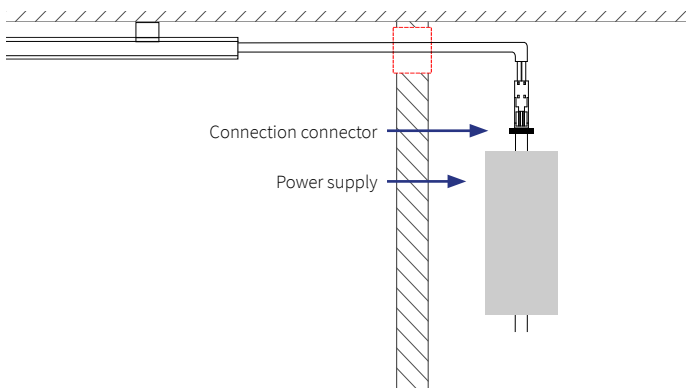

4.5 CONNECT POWER SUPPLY TO ELECTRICAL NETWORK

The connection connector must meet the appropriate electrical requirements for the intended purpose.

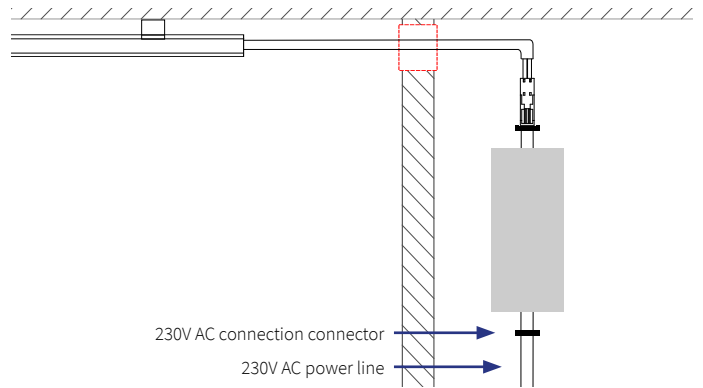

Power Supply

Use a constant voltage power supply for LED modules, 24V DC output, insulation class 2, SELV, certified according to EN61347 standards for Europe and UL8750 for USA.

INSTALLATION GUIDE

TOP ENTRY CABLE WITH C1M CONNECTOR BT 24V BAR

Exclusive document for product installation and assembly



1. SAFETY PRECAUTIONS



! CAUTION

The equipment must be installed by a certificated technician.

The electrical installation must respect the technical rules.

Install only indoors.

Switch off the electrical power before making any connection.

Respect the indicated voltage and installation procedure.

End-of-life: Don't discard as unsorted waste. Send to a WEEE (Waste, Disused Electrical and Electronic Equipment) collection point.

2. ACCESSORIES




180° fixing clip



C1F cable

3. DIMENSIONS (mm)

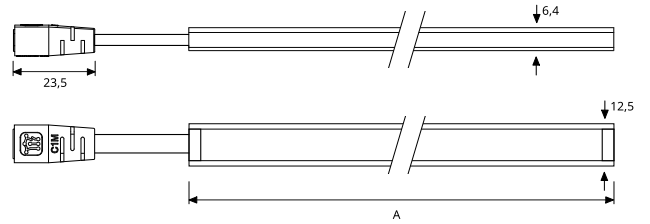


SIZE	A
8	90
16	170
24	250
32	330
40	410
48	490
56	570
64	650
72	730
80	810
88	890
96	970
104	1050

SIZE	A
112	1130
120	1210
128	1290
136	1370
144	1450
152	1530
160	1610
168	1690
176	1770
184	1850
192	1930
200	2010

4. INSTALLATION PROCEDURE


4.1 INSTALL FIXING CLIPS

Fix the 180° fixing clips to the ceiling or chosen surface.
Maximum distance between fixing clips: 60 cm.

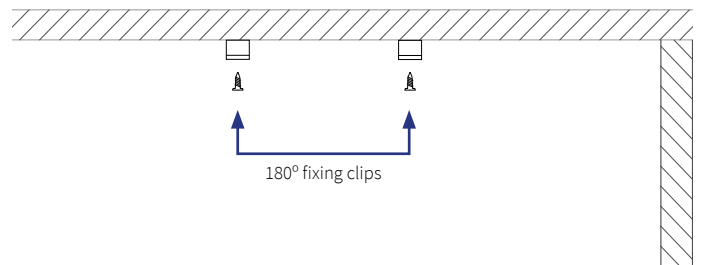


4.2 HOLE FOR POWER CABLE

Make a hole for the power cable to pass through.

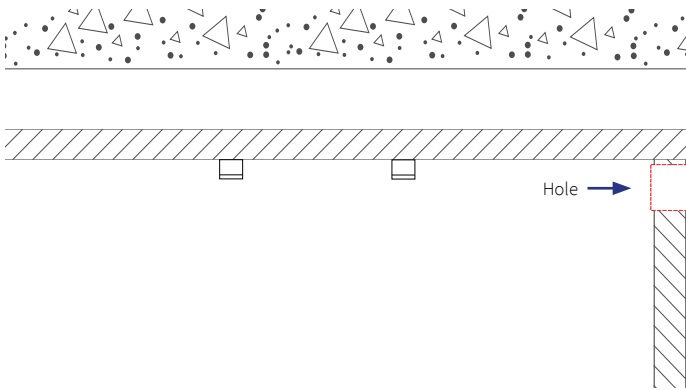


4.3 FIX THE BAR TO THE CLIPS

Attach the bar to the fixing clips.

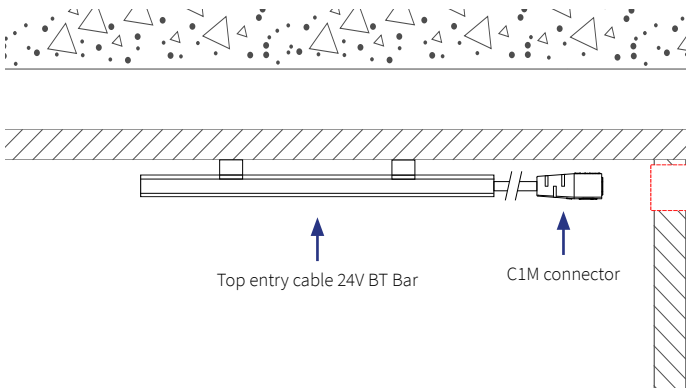


4.4 CONNECT THE CABLE TO THE POWER SUPPLY

The connection connector must meet the appropriate electrical requirements for the intended purpose.

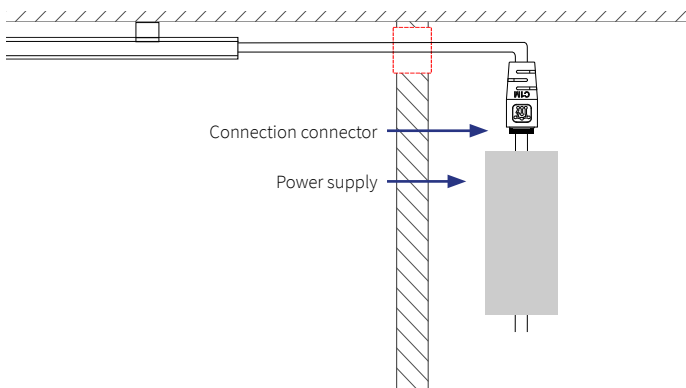

4.5 CONNECT POWER SUPPLY TO ELECTRICAL NETWORK

The connection connector must meet the appropriate electrical requirements for the intended purpose.

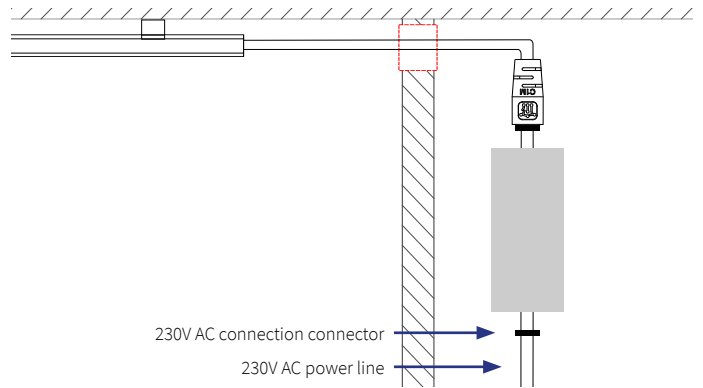

Power Supply

Use a constant voltage power supply for LED modules, 24V DC output, insulation class 2, SELV, certified according to EN61347 standards for Europe and UL8750 for USA.

INSTALLATION GUIDE

TOP ENTRY CABLE WITH DC24 CONNECTOR BT 24V BAR

Exclusive document for product installation and assembly



1. SAFETY PRECAUTIONS



CAUTION

The equipment must be installed by a certificated technician.

The electrical installation must respect the technical rules.

Install only indoors.

Switch off the electrical power before making any connection.

Respect the indicated voltage and installation procedure.

End-of-life: Don't discard as unsorted waste. Send to a WEEE (Waste, Disused Electrical and Electronic Equipment) collection point.

2. ACCESSORIES




180° fixing clip



DC24 cable

3. DIMENSIONS (mm)

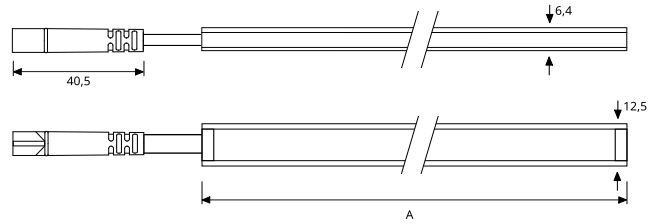


SIZE	A
8	90
16	170
24	250
32	330
40	410
48	490
56	570
64	650
72	730
80	810
88	890
96	970
104	1050

SIZE	A
112	1130
120	1210
128	1290
136	1370
144	1450
152	1530
160	1610
168	1690
176	1770
184	1850
192	1930
200	2010

4. INSTALLATION PROCEDURE


4.1 INSTALL FIXING CLIPS

Fix the 180° fixing clips to the ceiling or chosen surface.
Maximum distance between fixing clips: 60 cm.

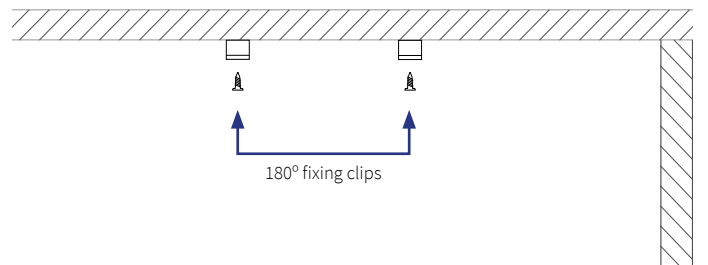


4.2 HOLE FOR POWER CABLE

Make a hole for the power cable to pass through.

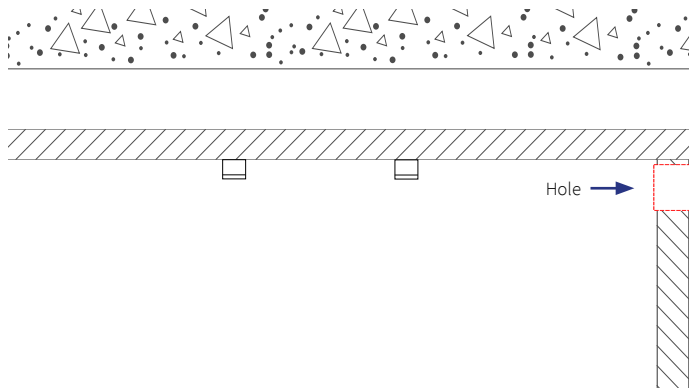


4.3 FIX THE BAR TO THE CLIPS

Attach the bar to the fixing clips.

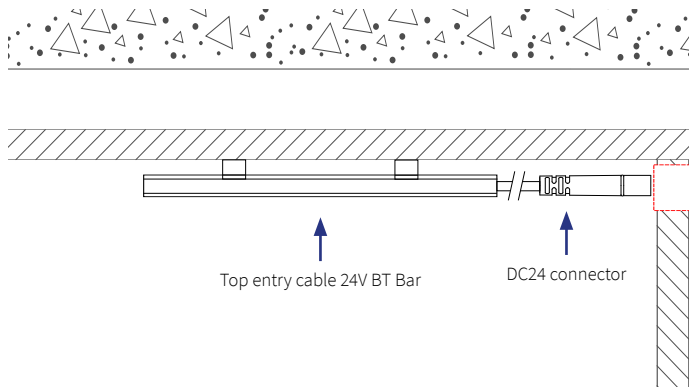


4.4 CONNECT THE CABLE TO THE POWER SUPPLY

The connection connector must meet the appropriate electrical requirements for the intended purpose.

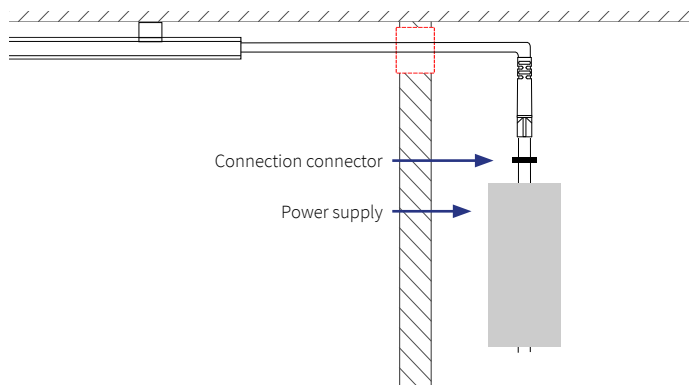

4.5 CONNECT POWER SUPPLY TO ELECTRICAL NETWORK

The connection connector must meet the appropriate electrical requirements for the intended purpose.

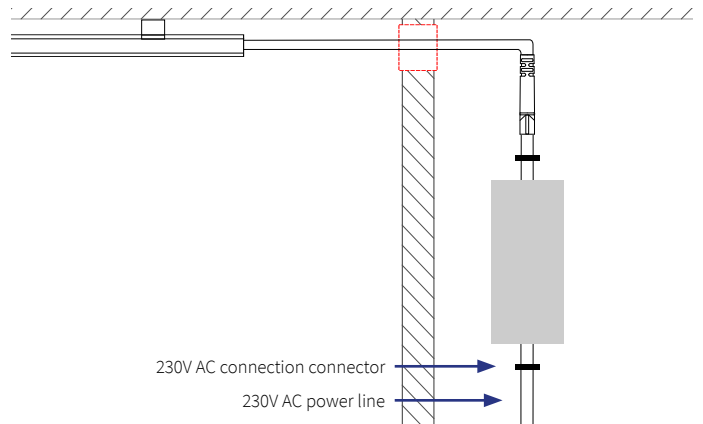

Power Supply

Use a constant voltage power supply for LED modules, 24V DC output, insulation class 2, SELV, certified according to EN61347 standards for Europe and UL8750 for USA.

5. GENERAL INFORMATION



CE marking

Product in accordance with the Council directive 2004/108/CE concerning the Electromagnetic Compatibility and the Council directive 2006/95/CE for low-tension equipment.



UE 2011/65/EU

Product complies with the directive that restricts the use of hazardous substances in electrical and electronic equipment.



Test procedure for LED that aims to determine the depreciation of the luminous flux over time.



The product must not be disposed of as unsorted waste, it must be sent to separate collection facilities for recovery and recycling.



Equipment suitable for indoor use.



Equipment suitable for outdoor use.



24V Direct current



Alternating current



Safety Extra-Low Voltage. The circuit is designed and protected that, during proper operation or in the event of a single fault, voltages do not exceed values considered safe.

Appliance classes

Protection against electric shock due to physical contact with the electrical part of the equipment.



Class I

The equipment must be connected to earth through a protective conductor (PE), usually coloured green or green and yellow.



Class II

The equipment has double insulation, eliminating the necessity of the protective conductor (PE).



Class III

The equipment uses a reduced voltage level and there is no risk of electric shock under normal conditions.

IP Code

Assesses the degree of protection against intrusion, dust, accidental contact and water according to IEC 60529.



The IP code consists of 2 digits, the first relating to solid particles and the second to the presence of water.

IP0X Not protected

IP1X Solids ≥ 50 mm diameter

IP2X Solids $\geq 12,5$ mm diameter

IP3X Solids $\geq 2,5$ mm diameter

IP4X Solids ≥ 1 mm diameter

IP5X Dust

IP6X Dust proof

IPX0 Not protected

IPX1 Dripping water

IPX2 Dripping water when tilted up to 15°

IPX3 Water spray

IPX4 Water splash

IPX5 Water jets

IPX6 Powerful water jets

IPX7 Immersion up to 1m for 30min

IPX8 Continuous immersion in water